

Study of functional parameters of a conveyor by modeling and simulation

Florin Blaga^{1,*}, and Iulian Stanasel¹

¹University of Oradea, Industrial Engineering Department, Universităţii 1, Oradea, Romania

Abstract. The transfer systems conveyor type are an important component of the modern manufacturing systems. Designing and constructing a conveyor involves evaluating its performance for the adoption of the most effective constructive solutions. The paper shows how modelling and simulation can be used in assessing the performance of a conveyor. The studied parameters refer to the kinematic characteristics (the speed of the conveyor) and to the functional indicators of the system components (input rate, service rate).

1 Introduction

The conveyors are transfer systems which are used to carry different products in successive steps up to the point of destination. Also, with the aid of conveyors is ensured buffer volumes of products to balance the flow when it is necessary [1]. The study of the performance of these systems through modelling and simulation is the subject of several researches.

In [2] is presented a method for designing the driveshaft of a monorail conveyor, using CAD-CAE applications.

In paper [3] a model comparison approach based on material flow systems is investigated That is divided into a microscopic and a macroscopic model scale.

The paper [4] studying existing conveyor system and optimize the critical parts like: Roller, shafts, c-channels for chassis and support, to minimize the overall weight of assembly and material saving.

An applicable scheme for production design in manufacturing, and provides a valuable tool to conclusively obtain the optimal profit of a given production quantity for operations research engineers in today's manufacturing with profound insight is presented in [5].

This paper highlights how modeling and simulation have been used to improve the solutions adopted in the implementation of a transfer system (of) conveyor-type.

2 Modeling the conveyor using the Taylor ED program

Figure 1 shows the model of the transport system conveyor-type developed in the Taylor ED program. The conveyor is composed of four sections: 4 and 6 are linear segments, 5 and 7 are circular segments. Also in Figure 1 are shown the other components of the system in which the conveyor is integrated. Thus, the following "atoms" (name specific to the TaylorED program) are highlighted:

1- Product; 2- Bringing installation (source); 3, 8 - Operators; 9 - The Team Block is specific to Taylor ED (it interconnects the operators); 10- Exhaust system.

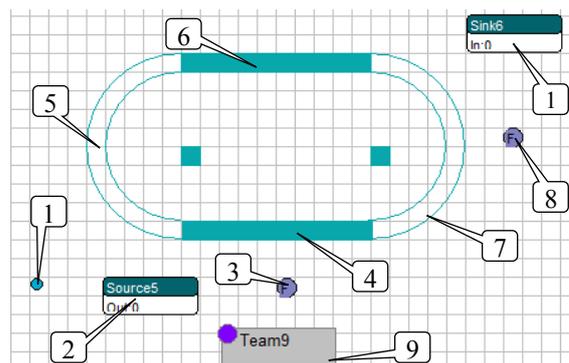


Fig. 1. The model of the conveyor system

In Figure 2 are highlighted the connections between the components of the model. These connections are established between the output ports and the input ports of the elements (atoms) of the model.

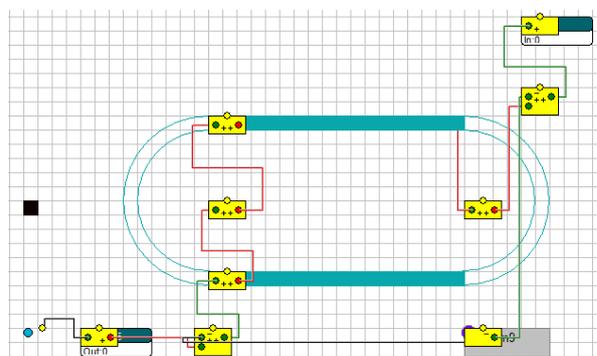


Fig. 2. The model of the system with the connections between atoms.

For each component of the model are made the settings which correspond with to the characteristics of the real system. Thus, in the case of the bringing

* Corresponding author: fbлага@uoradea.ro

installation (source), is set the time interval between two successive inputs. In the first variant, the interval between two successive entries is considered to be a deterministic parameter with a value of 60 seconds (1 minute) (Fig. 3).

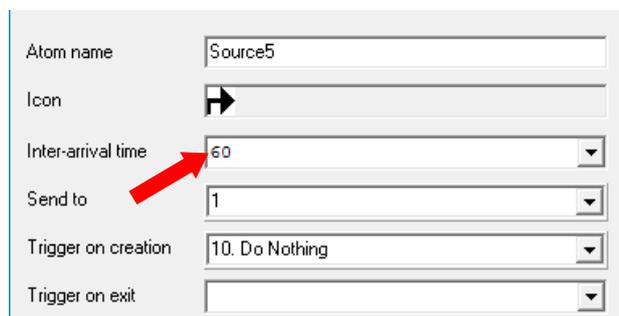


Fig. 4. Setting Inter-arrival time. Variant 1.

The parameters (capacity, length, speed) of the linear sections of the conveyor are shown in Figure 6. In Figure 7 is shown the window setting of specific parameters of the circular sections of the conveyor (speed, radius).

The seeded speed is proportional to the real speed

$$Speed_{model} = 5 * Speed_{real\ system} \quad (1)$$

Speed multiplication was required because in the model also the distances are five times higher compared to the real system.

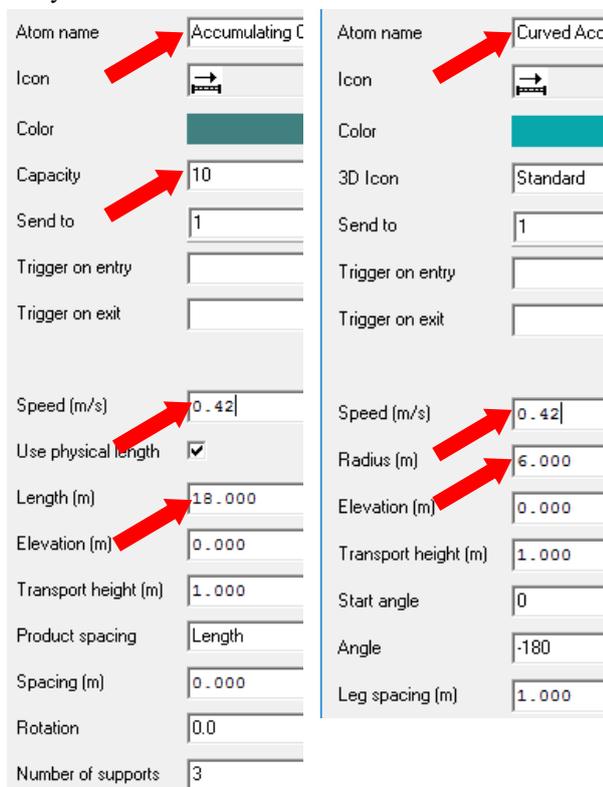


Fig. 5. Setting the parameters of the linear sections and circular of the conveyor. Variant 1

To simulate the operation of the conveyor system, a few adjustments must be done in the main menu - *Simulate*.

The reference interval of time for the simulation *Set Stop Time*- 8 hours (Fig. 6). Will be recorded information relating to all the components of the model History- All on) on the reference interval of time for which the simulation is done (Fig. 6). To start the simulation is enable the option *Reset+ Run until Stoptime* (Fig. 6).

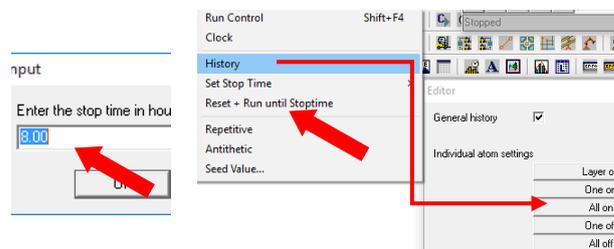


Fig. 6. Setting the reference time and the option to record data

After the simulation, it is generated a summary report which shows the performance of the system components. This report is shown in Figure 7. It may be observed that the system has entered 480 parts and was evacuated 472 parts. The report also shows how many parts there are in each component of the system when the simulation is finished.

For example, on the first linear segment there is a part. Another information refers to the average number of parts, (considering the reference time 8 hours) which can be found on a specific component of the system. Thus, the average number of parts on the first curved section of the conveyor is 3.442.

summary report

name	content		throughput		staytim average
	current	average	input	output	
Accumulating Co	1	0.713	480	479	42.768
Curved Accumula	3	3.442	475	472	208.683
Curved Accumula	4	3.469	479	475	208.585
Accumulating Co	0	0.297	475	475	18.000
Source5	0	0.000	480	480	0.000
Sink6	0	0.000	472	472	0.000
Product	0	0.000	0	0	0.000
Free Operators8	0	0.000	480	480	0.000
Team9	0	0.000	0	0	0.000
Free Operators2	0	0.000	472	472	0.000

Model start time: Saturday, November 25 2017 10:05:19
 Model end time: Saturday, November 25 2017 18:05:19
 Runlength (seconds): 28800.00

End of report.

Fig. 7. Summary report of the simulation. Varinat 1

In addition to the synthetic report, the Taylor ED program provides detailed information about each component of the system. Thus, in Figure 8 is shown the filling degree of the source (Status overview). It was busy in the proportion of 100%.

3 Simulation of conveyor system operation

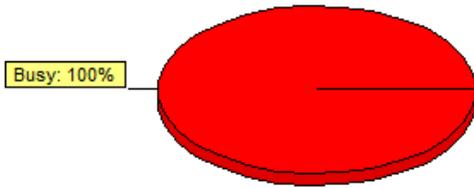


Fig. 8. The degree of loading of the source. Variant 1

Figure 9 shows the time progress of the number of parts in the waiting string of the first curved segment. So in this string are found, alternatively, 3 or 4 pieces.

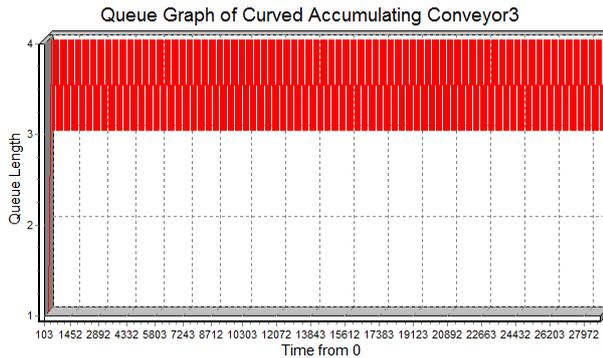


Fig. 9. The evolution in time of the number of parts in the waiting string of the first curb segment

The built model allows simulation taking into account other functional parameters. Thus, if it is considered the time interval between two entries in the system, for a random variable it can be assigned a probability function of the negative exponential type. (Fig.10). The average value for the time interval between two successive inputs is 30 seconds.

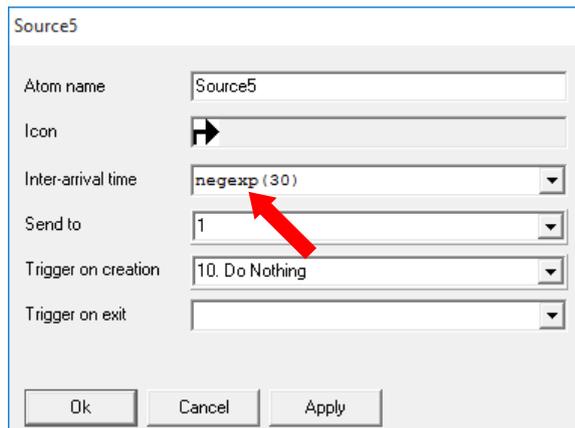


Fig. 10. The Setting of random entries

In figure 11 are presented the results of the simulation shown in the summary report. Thus, have entered in the system 984 parts and 982 come out.

The average time that a part spends on the different sections of the conveyor varies between 31,032 seconds (linear segment) and 32,499 seconds (curve section) (Fig.11)

name	content		throughput		staytime average
	current	average	input	output	
Accumulating Co	0	1.060	984	984	31.034
Curved Accumula	1	1.109	983	982	32.496
Curved Accumula	0	1.110	984	984	32.499
Accumulating Co	1	1.060	984	983	31.032
Source5	0	0.000	984	984	0.001
Sink6	0	0.000	982	982	0.000
Product	0	0.000	0	0	0.000
Free Operators8	0	0.002	984	984	0.045
Team9	0	0.000	0	0	0.000
Free Operators2	0	0.000	982	982	0.000

Model start time Sunday, November 26 2017 00:15:59
 Model end time Sunday, November 26 2017 08:15:59
 Runlength (seconds) 28800.00

Fig. 11. Summary report of the simulation. Variant 2

Figure 12 shows the histogram of the waiting string corresponding to the first linear segment of the conveyor. It is highlighted that the waiting string contains 0, 1, 2, 3, 4, 5 pieces at different intervals of time.

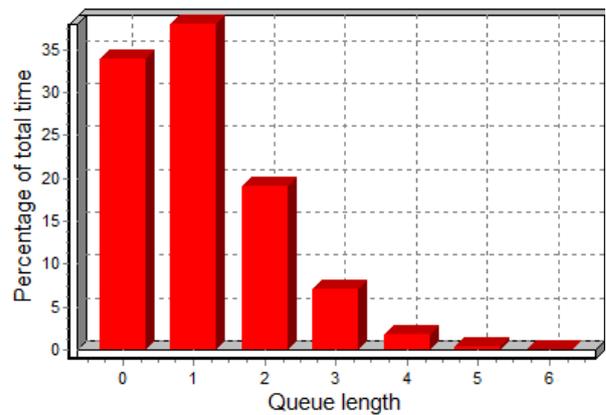


Fig. 12. The histogram of the waiting string corresponding to the first linear segment of the conveyor.

The variation of the number of parts on the second circular segment is shown in Figure 13.

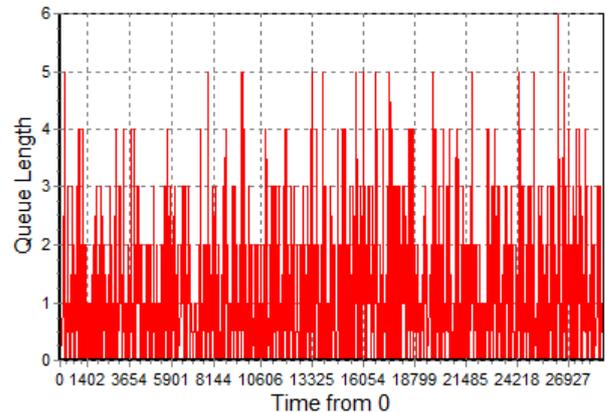


Fig. 13. The variation of the number of parts on the second circular section.

4 The integration of the transfer system conveyor type into a complex manufacturing system

The transfer system of conveyor type can be integrated into a complex manufacturing system (Figure 14) with two machines tools (servers) (positions 11 and 14) and

two linear conveyors (12 and 13). In Figure 20 are presented the components of manufacturing system interconnected between them.

In the case of this model time of processing have random sizes. The function of the probability is negative exponential type [6] expressed by:

$$f(t) = \beta e^{-\beta t} \quad (2)$$

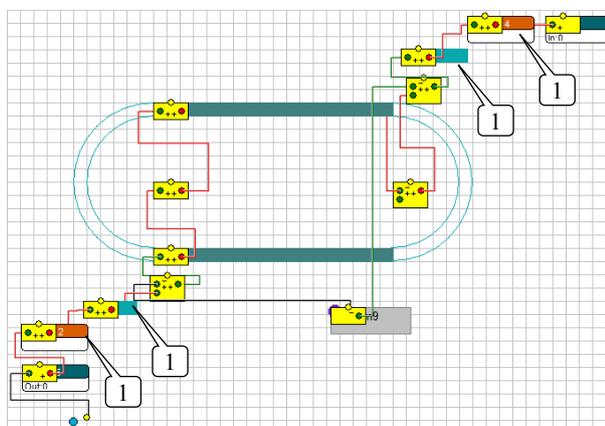


Fig. 14. The transfer system conveyor type integrated into a complex manufacturing system.

In figure 15 is presented the synthetic report. It highlights the fact that 685 parts have been entered into the system and 677 were evacuated.

name		content		throughput		staytime average
		current	average	input	output	
Accumulating Co	1	0.737		684	683	31.033
Curved Accumula	2	0.958		681	679	40.528
Curved Accumula	1	0.770		683	682	32.453
Accumulating Co	1	0.734		682	681	31.012
Source5	0	0.307		685	685	12.893
Sink6	0	0.000		677	677	0.000
Product	0	0.000		0	0	0.000
Free Operators8	0	0.000		684	684	0.018
Team9	0	0.000		0	0	0.000
Free Operators2	0	0.152		679	679	6.466
Accumulating Co	0	0.095		684	684	4.000
Server12	1	0.617		685	684	25.924
Accumulating Co	1	2.068		679	678	87.696
Server14	1	0.809		678	677	34.383

Model start time Sunday, November 26 2017 18:37:19
 Model end time Monday, November 27 2017 02:37:19
 Runlength (seconds) 28800.00
 End of report.

Fig. 15. Summary report of the simulation. Variant 3.

The Taylor ED program provides information on the performance parameters of the system components. Thus, Figure 16 shows the occupancy degree of the machine 1. It is found that the machine processes 62% of the reference time interval (8 hours).

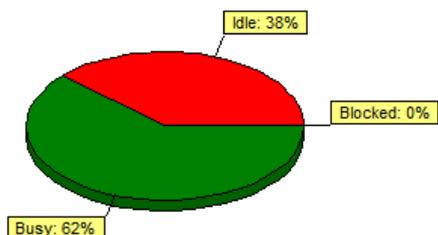


Fig. 16. The degree of loading of the machine 1 (position 11).

Figure 17 highlights the histogram of the first linear section of the conveyor. Thus, 37% of the time on this section there is only one part into the string, 15% of the time they are two machines and there are three parts in 2.5% the reference time.

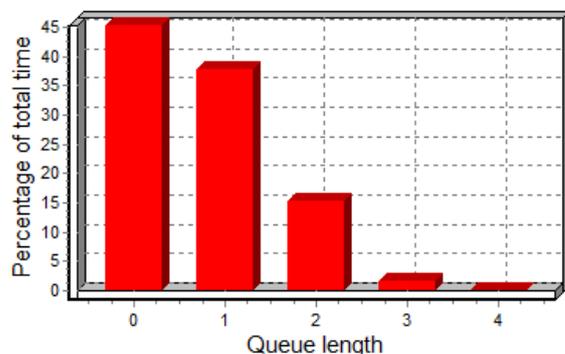


Fig. 17. The histogram of the first linear section of the conveyor.

5 Conclusions

Modeling and simulation are appropriate tools for evaluating the performance indicators of manufacturing systems and their components. In the case of the conveyor system, the Taylor ED program allows obtaining detailed information about the components of the manufacturing system in which the conveyor is integrated. Through simulation, the model allows the evaluation of the operation of the conveyor with different sets of data, so that the decision making factor has information to optimize the system form the constructive design and functional point of view.

References

1. M. Hapenciu, *Transport equipment in the food industry* (in romanian) (Ed. Fundației Universitare “DUNĂREA DE JOS” Galați, 2004)
2. I. Stănășel, F. Blaga, D. Crăciun, C. Bungău, T. Buidos, *AN. UO. FMTE*, **3**, 27 (2016)
3. S. Göttlich, S. P. Schindler, V. Schleper, A. Verl, *Apl. Math. Mod.* **38**, 3295 (2014)
4. S. M. Shinde, R.B. Patil, *Int. J. Emer. Techno.*, **3** (1): 168, (2012)
5. Chun-Hsiung Lan, *Int. J. of Adv. Man. Techno.* **22** (7), 510, (2003)
6. I. Abrudan, *Flexible manufacturing systems. Concepts of design and management* (in romanian) (Ed. Dacia, Cluj- Napoca, 1996)

The work is a part of project MANUNET ERA-NET, Contract nr.19/2015 “Monorail conveyor system for automated production lines”.